


Guide to set up the HOME2US receiver

Important note: Please make sure that the TV's input is selected to receive the signal from the RECEIVER.


Turn on the RECEIVER.

The start-up logo below should appear on TV screen.

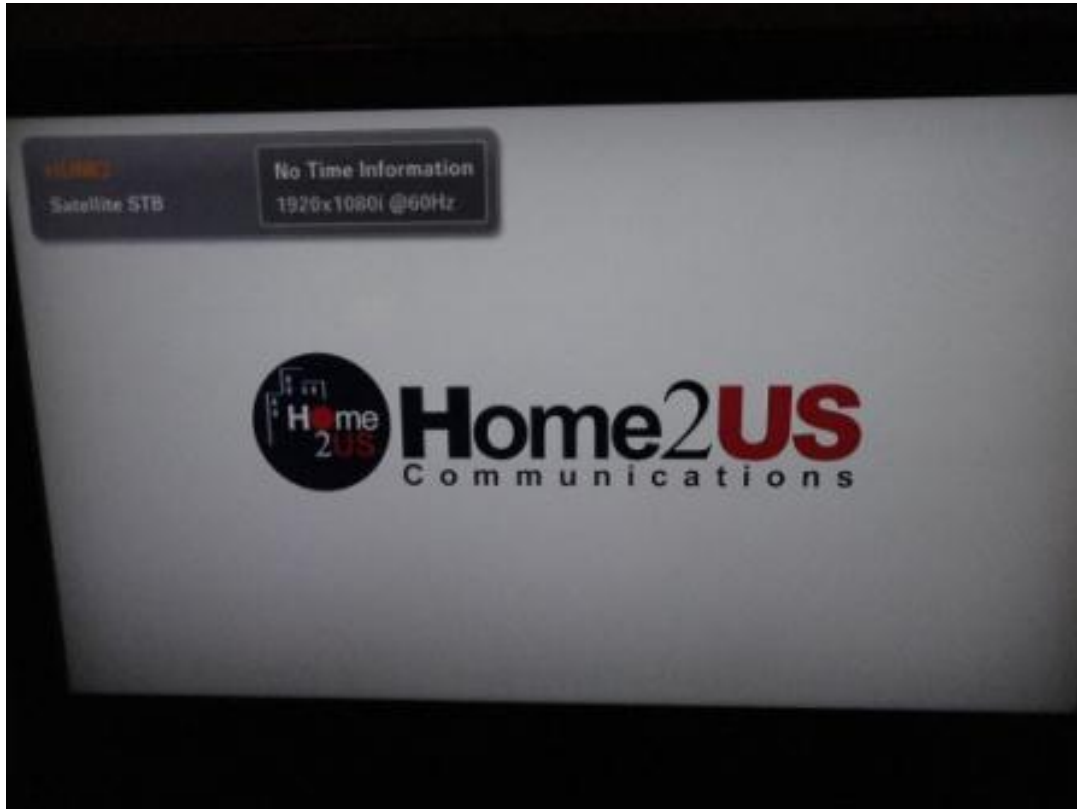



Press **OK / Enter** button to select the language.

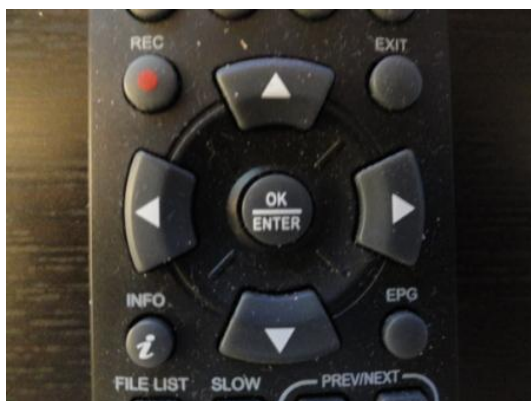




Press the right arrow and select MANUAL time settings.






Press the DOWN arrow to set the time.

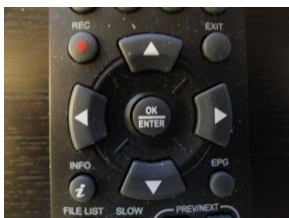

Enter the Time in Military style by using the numeric buttons : 3 PM = 15:00



Press the BLUE button that is named as TEXT

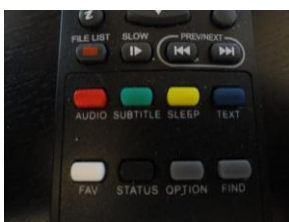




Press DOWN arrow and enter the date in European Style with numeric buttons.
 Example: April 26 2012 = 26 / 04 / 2012.




Press the BLUE button that is named as TEXT

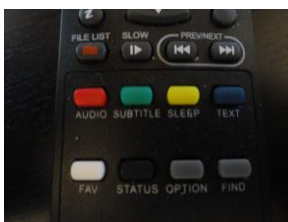




Press the BLUE button that is named as TEXT

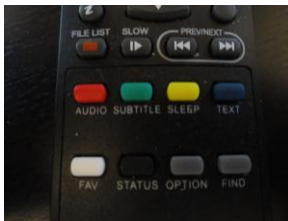

Press OK button to select SES 1

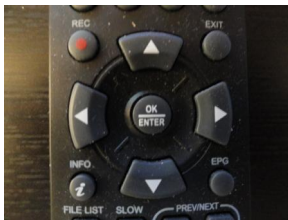



Press RED button that is named as AUDIO.

Make sure that the signal levels on the right of the TV screen are above:

S: > 90 %

Q: > 50 %

Press RED Audio button to start the channel search





Press the OK / ENTER to save.

After successfully scanning the transponders and saving the channels, the RECEIVER will display the first available channel.

By pressing UP / DOWN buttons, select the channel you wish to watch.

If there is a display stating that “You do not have permission to view the channel”, please wait about 1 minute for the RECEIVER to unscramble the channel.

If the display still exists and there is no picture, please open the Card Slot cover, pull out the Smart Card and call Home2US Communications at 1-888-312-2182 to activate the Smart Card.